


6HH – TAD1171VE

Diesel driven pump 10", high pressure

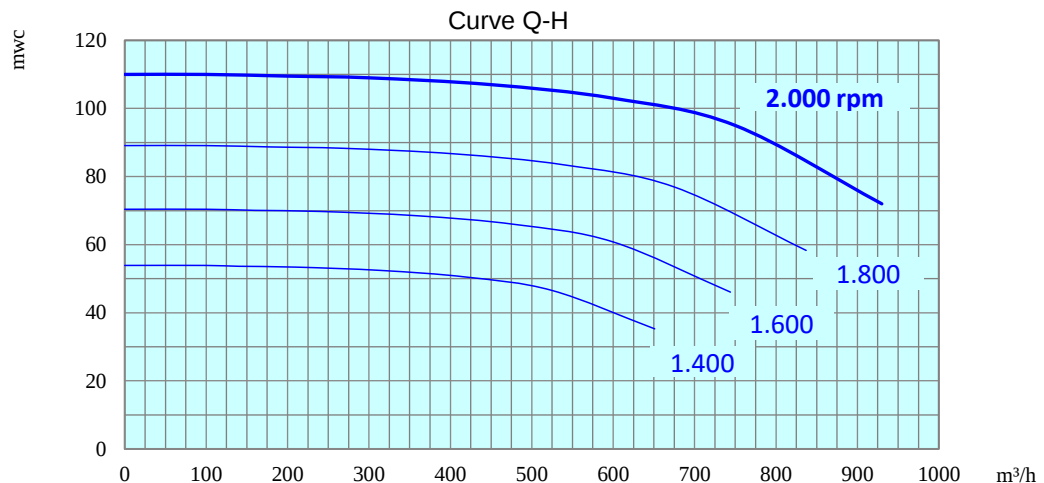

Type	: BBA BA-C150H7
Applications	: jetting, fire fighting-like applications, quarries, mines, clear and polluted water, ...
Engine	: Volvo Penta TAD1171VE cilinder diesel engine, watercooled, sound attenuated
Power output	: 241 kW at 2.000 rpm
Free impeller passage	: 31 mm ø
Starting system	: 24 V electric start
Weight	: 7.500 kg (dry)
Tankage	: 300 liters Adblue / 80 liters fuel
Consumption	: 63 liters / hour at maximum capacity
Autonomy	: 1 h at maximum capacity
Dimensions	: 5.000 x 1.710 x 2.260 mm
Coupling	: suction : DIN-flange DN250 PN10 discharge : DIN-flange DN150 PN16, gate valve DN150 PN16 included
Characteristics	: on skid, sound attenuated fully bunded canopy ca. 74dB at 10m automatic dry self priming, indefinite dry-running possible
Equipment	: adjustable speed, spark-arrestor, Chalwyn valve, master switch Automatic level adjustment by 2 floats or probe 4-20 mA Threeway valve for the connection of an external fuel tank, central lifting eye, forklift pockets